

Ecostat Select

Ecostat Select thermostatic bath mixer for exposed installation

Surfaces: **white/chrome** Article Number: **13141400**



Description

product features

- 2 outlets
- safety lock at 40° C
- flow rate hand shower connection at 0.3 MPa: 12 l/min
- flow rate bath filler (at 0.3 MPa): 20 l/min
- operating pressure: min. 0.1 MPa / max. 1.0 MPa
- shelf made of safety glass
- shelf finish: chrome or white
- connection type: s-shaped connections
- in case of installation on existing G 1/2 connections, adaptor no.02026000 must be used

consists of

- S-Union Set (#95772XXX)


Technology




Product image



Scale drawing

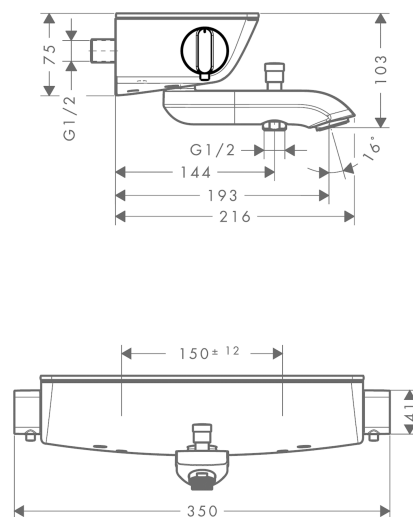

Flowchart

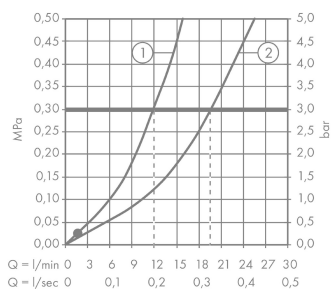

- ① Shower outlet with 1B-resistance
- ② Tub outlet