

ShowerSelect S

Thermostatic mixer for concealed installation for 2 functions

Surfaces: **chrome** Article Number: **15743000**



Description

product features

- 2 outlets
- simultaneous use of several outlets
- Select push-button on/off control for 2 outlets
- safety lock at 40° C
- flow rate hand shower connection at 0.3 MPa: 23 l/min
- flow rate upper outlet: 25 l/min
- operating pressure: min. 0.1 MPa/max. 1.0 MPa

Mandatory Accessoires

- Basic set iBox universal (#01800XXX)
- iBox universal Basic with pre-mounted angle connection G1/2 (#01810XXX)

Optional Accessoires

- Extension element Ø 150 mm (#13597XXX)
- iBox universal basic set extension 25 mm (#13595XXX)


Technology



Product image



Scale drawing

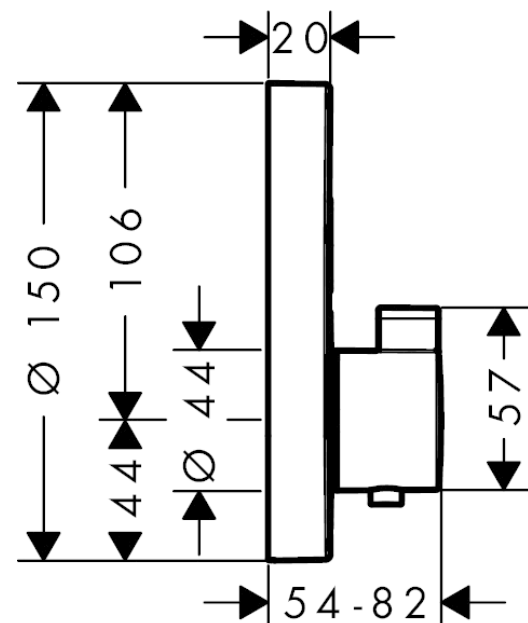

ShowerSelect S

Thermostatic mixer for concealed installation for 2 functions

Surfaces: **chrome** Article Number: **15743000**



Flowchart

