

ShowerSelect

Thermostatic mixer for concealed installation for 2 functions with Fixfit and porter unit

Surfaces: **chrome** Article Number: **15765000**



Description

product features

- 2 outlets
- simultaneous use of several outlets
- Select push-button on/off control for 2 outlets
- safety lock at 40° C
- flow rate hand shower connection at 0.3 MPa: 14 l/min
- flow rate upper outlet: 29 l/min
- operating pressure: min. 0.1 MPa / max. 1.0 MPa
- integrated shower support

Mandatory Accessoires

- Basic set iBox universal (#01800XXX)
- iBox universal Basic with pre-mounted angle connection G1/2 (#01810XXX)

Optional Accessoires

- Isiflex shower hose 1.60 m (#28276XXX)
- Raindance Select S 120 3jet hand shower (#26530XXX)
- Axor Starck 2jet baton hand shower (#28532XXX)

Technology



Design awards



reddot award 2014
winner




DESIGN
AWARD
2015

Product image



Scale drawing

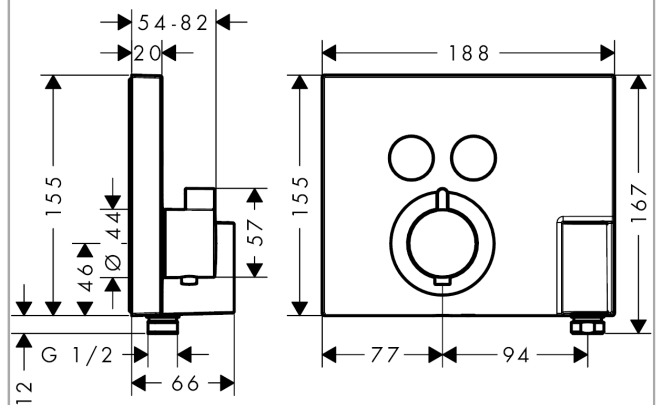

ShowerSelect

Thermostatic mixer for concealed installation for 2 functions with Fixfit and porter unit

Surfaces: chrome Article Number: 15765000



Flowchart

