

ShowerTablet Select

Bath thermostat 400 for exposed installation

Finish: **Matt Black** Article Number: **24340670**



Description

product features

- rotatable bath spout
- 2 functions
- simultaneous utilization of 2 functions
- temperature and volume control
- Select push-button on/off control for 2 outlets
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- maximum flow rate at 3 bar: 18,7 l/min
- flow rate for bath spout at 3 bar: 18,7 l/min
- flow rate of hand shower at 3 bar: 15,9 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- material handles: plastic
- shelf made of plastic
- surface shelf: graphite
- connection dimension: DN15
- connection type: s-shaped connections, G ½
- wall-mounted
- centre distance: 150 ± 12 mm
- dirt filter included
- thermostat is delivered with buttons hand shower and bath tub

Technology



Select



Cool Contact



Rotatable Bath Spout



Water Flow Control



Thermostat

Design awards



reddot winner 2021




ShowerTablet Select
Bath thermostat 400 for exposed installation
 Finish: **Matt Black** Article Number: **24340670**



Product image



Scale drawing

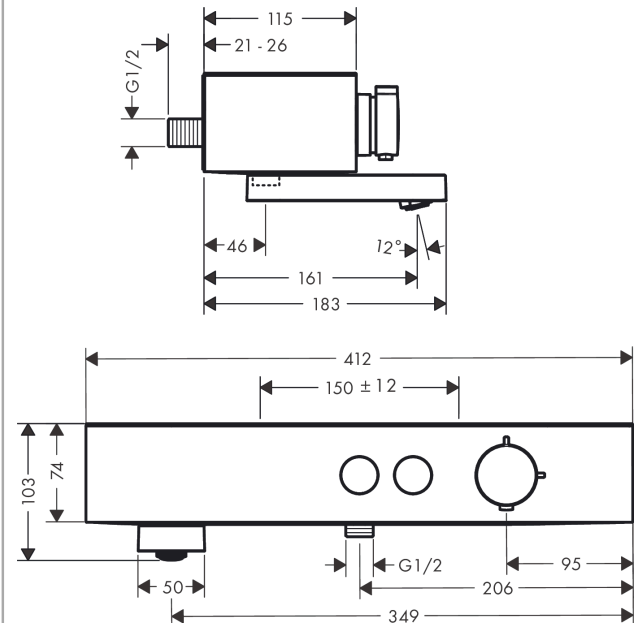

ShowerTablet Select


Bath thermostat 400 for exposed installation

Finish: **Matt Black** Article Number: **24340670**



Exploded Drawing

Year of production: >04/22

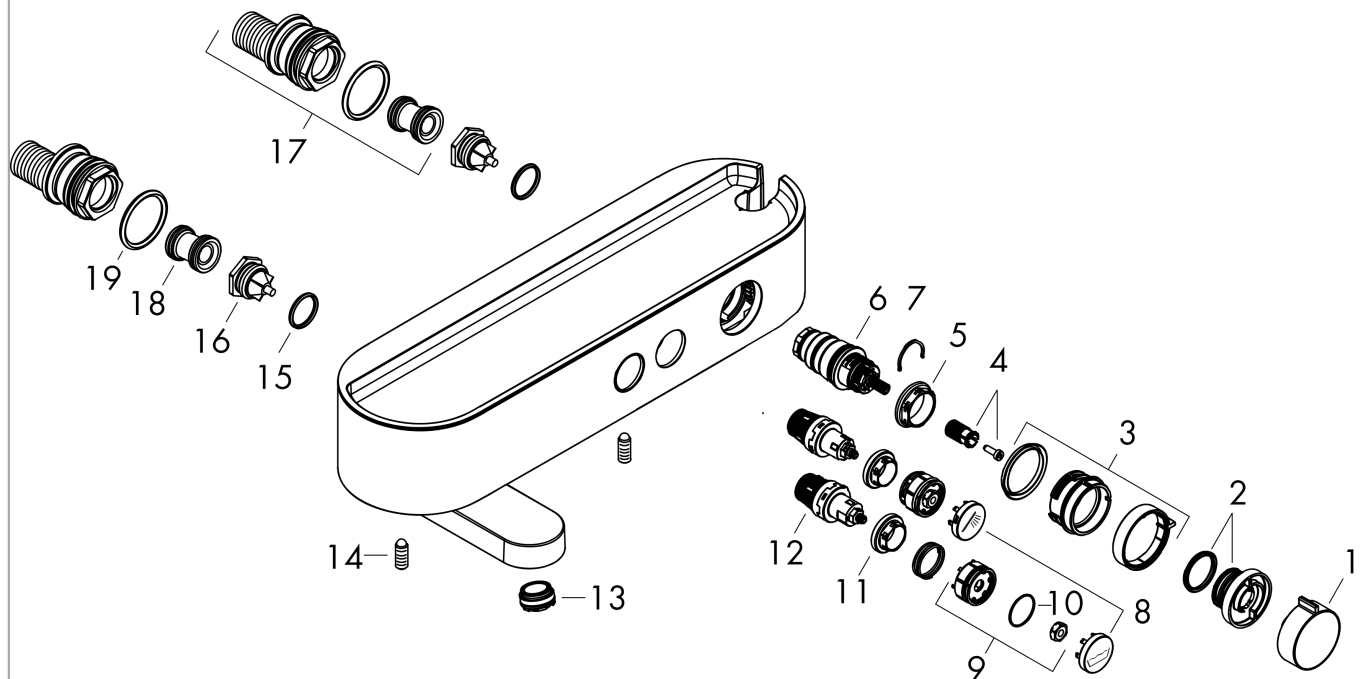

ShowerTablet Select**Bath thermostat 400 for exposed installation**Finish: **Matt Black** Article Number: **24340670****Spare part list**

Year of production: >04/22

Pos.	Description	Article Number	PC	PU
1	handle	94403670	59	1
2	safety set	94404000	9	1
3	handle	94405670	57	1
4	handle fixing set	92136000	6	1
5	nut	98913000	6	1
6	thermostat cartridge	98282000	14	1
7	cartridge for exchanged connections	92373000	18	1
8	set of symbols	98367670	60	1
9	spring with sleeve	92340000	4	1
10	O-ring 20x1	98140000	1	1
11	nut	98368000	4	1
12	shut off unit	95758000	14	1
13	aerator M24x1 C	92934000	6	1
14	hollow set screw M6x16 including o-ring 29x3	98372000	3	1
15	O-ring 17x2	98199000	1	1
16	non return valve (pressure-resistant up to 2 MPa)	95773000	8	1
17	set of S-unions	95772000	13	1
18	noise reduction	96429000	2	1
19	O-ring 29x3	98371000	2	1